


CONCRETE CRUSHER

X150



TP

For all mini excavators & demolition robots

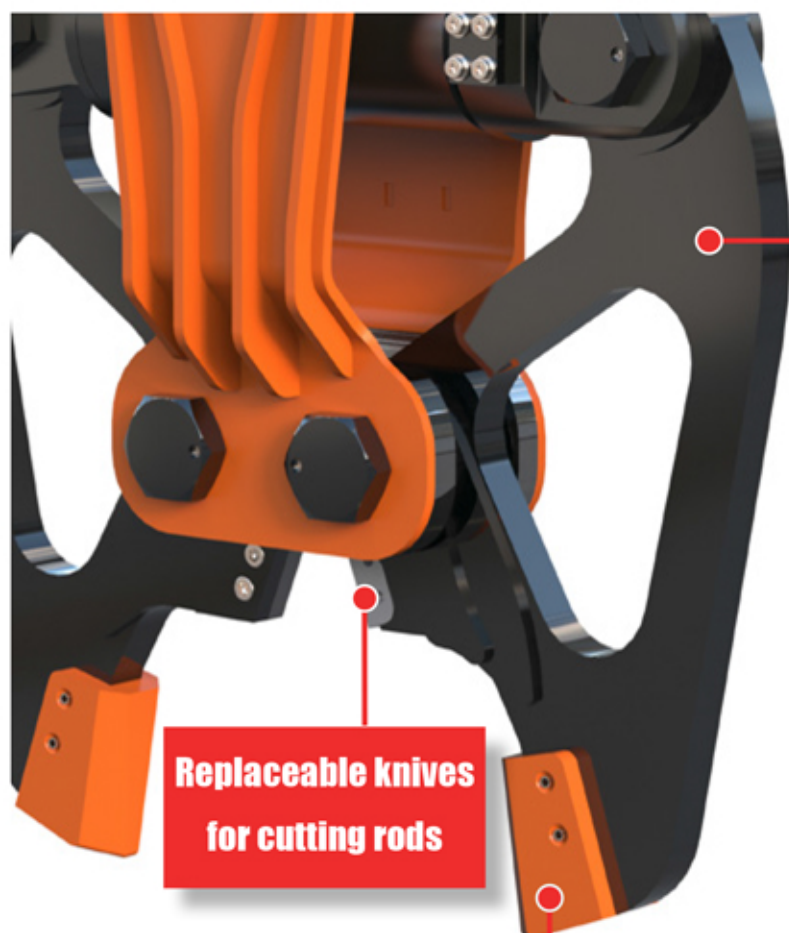


Ergonomic arms shape ensures high strength

Replaceable knives for cutting rods

Replaceable concrete crushing jaws

Heavy duty housing and cover

HARDOX used in arms

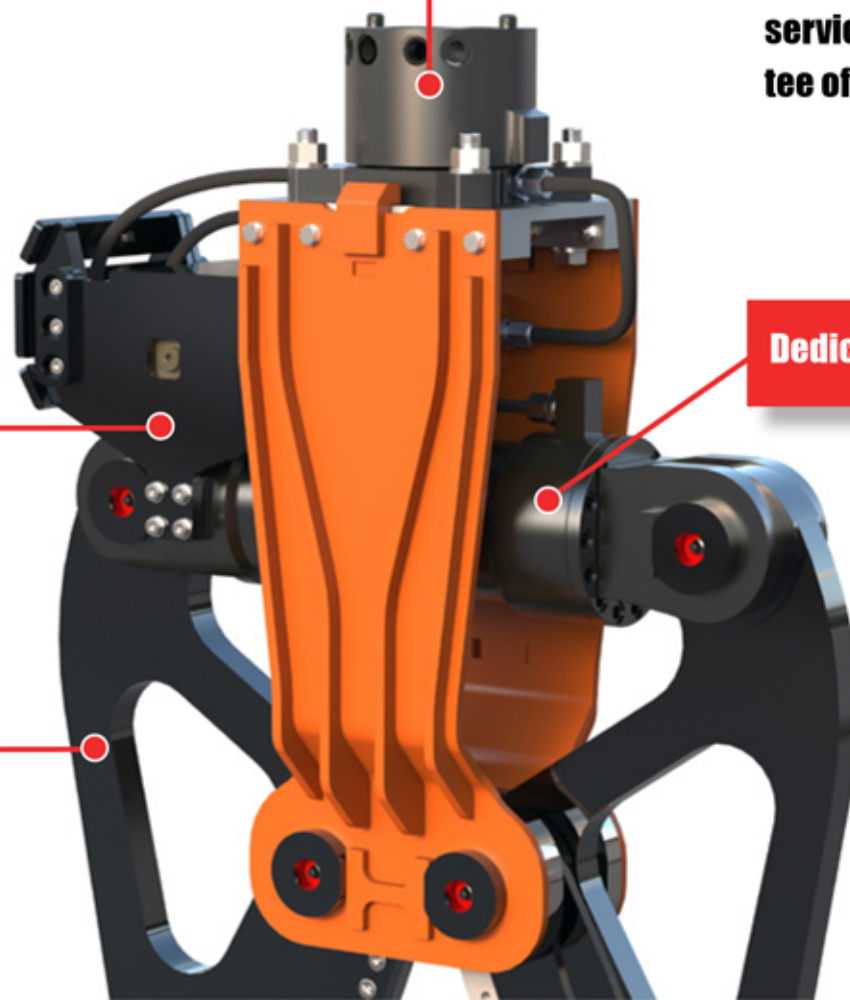

Rotator 360° as standard

Dedicated cylinder 500bar


Dedicated coupler for all type of demolition robots and mini excavators



The weight of **150 kg** and the oil flow of **20l/min** guarantees that the concrete crusher can be used on every mini excavator and demolition robot. The X150 uses an innovative pin connection that guarantees **work safety**. The high efficiency of the dedicated oil booster and actuator provides forces unprecedented in concrete crushers on the market. X150 is made from robust and quality materials and this enables us to offer **extended warranty**. The standard also includes a 360 rotator with a dedicated valve that allows for **quick work** of the X150. Ease of service, 24/7 access to spare parts is a guarantee of **business safety**.

SPECIFICATIONS:

device carrier	~1000	[kg]
weight	150	[kg]
dimensions H x L x D	920x690x230	[mm]
minimum oil flow	20	[l/min]
max oil flow	55	[l/min]
minimum pressure	160	[bar]
max boost pressure	500	[bar]
time close / open arms	2,2 / 1,8	[s]
max opening width - concrete crushing	330	[mm]
max opening width - cutting	70	[mm]
breaking force - concrete crushing	343,6	[kN]
breaking force - cutting	1075,9	[kN]
cutting capacity	Ø 30	[mm]
rotator 360°	as standard	

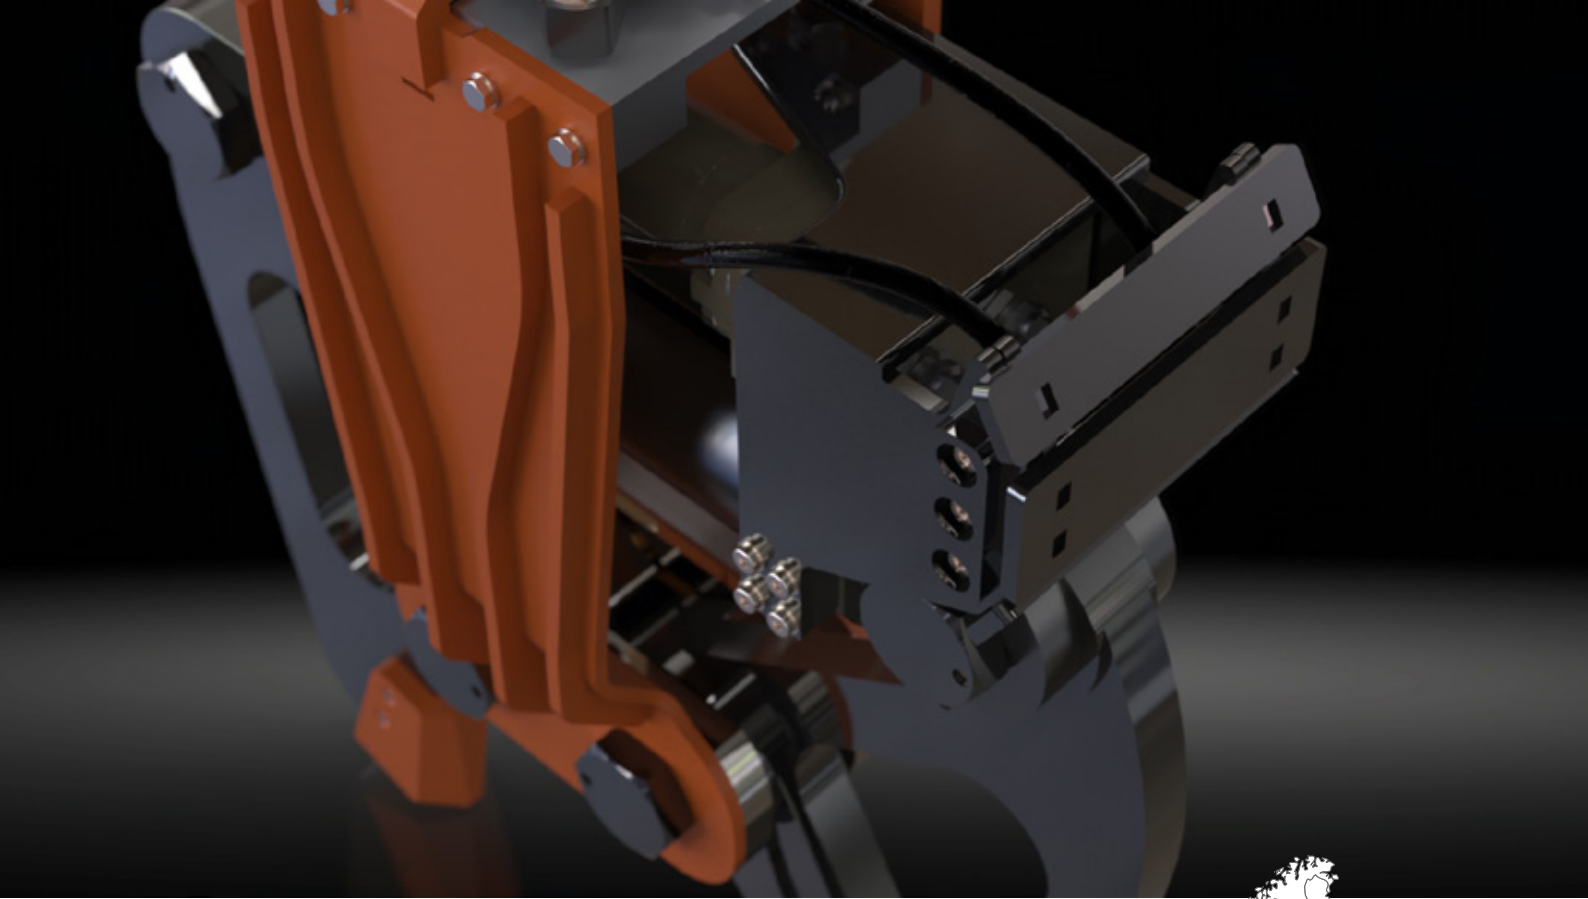

Tophoe Polska Sp. z o.o.

e-mail: kontakt@tophoe.pl
website: www.tophoe.pl
social media: www.linkedin.com/company/tophoe/

Address:
ul. Strzegomska 55d
53-611 Wrocław
Poland



Phone:
PL: +48 71 340 22 46
FR: +33 6 88 15 78 16

